ARCHITECTURAL ELEMENTS

5210 series

METAL SKIRTING

Used for walls in a variety of finishes such as aluminum anodized, stainless steel, & powder coated aluminum. Can be manufactured in various heights & shapes. Offered in a wide range of designs, sizes, colors & finishes.

FEATURES

MATERIAL

Aluminum Alloy as per EN AW 3000 or 5000 series.

Zinc Plated Galvanized Steel G90 grade.

Stainless Steel grade SS304 or SS316L

THICKNESS

Aluminum, Galvanized Steel or Stainless Steel (mm): 0.6 to 2.0

+ Custom thickness are available upon request

SURFACE FINISH

Plain

SIZE

LENGTH (mm): ≤3000

WIDTH (mm): ≤300

+ Custom sizes are available upon request

COATING

Polyester Coating:
((5μ (Back) + 20μ (Face))

Polyester Powder Coating:
(70μ -80μ)

+ High Performance Coatings like PESDF, PVDF and POLYAMIDE are available upon request.

COLOR / FINISH

RAL 9003 | RAL 9010

RAL 9016 | RAL 9006

SPECIAL FINISHES

Red Oak | Natural

Mirror | Brush

+ See www.dorsoram.com for additional colors & special f inishes available

+ Special finishes can be provided in lamination, sublimation or coil coating process.

DATA / PERFORMANCE

ANTI BACTERIAL COATING

Tested as per JIS Z 2801: 2000, which inhibits the growth of bacteria on the applied surface.

LIGHT REFLECTANCE (LR)

Achieved by the metal ceiling is LR – 0.85-0.96 tested as per ASTM E 1477.

RAM 5211 METAL SKIRTING

ISOMETRIC DETAIL

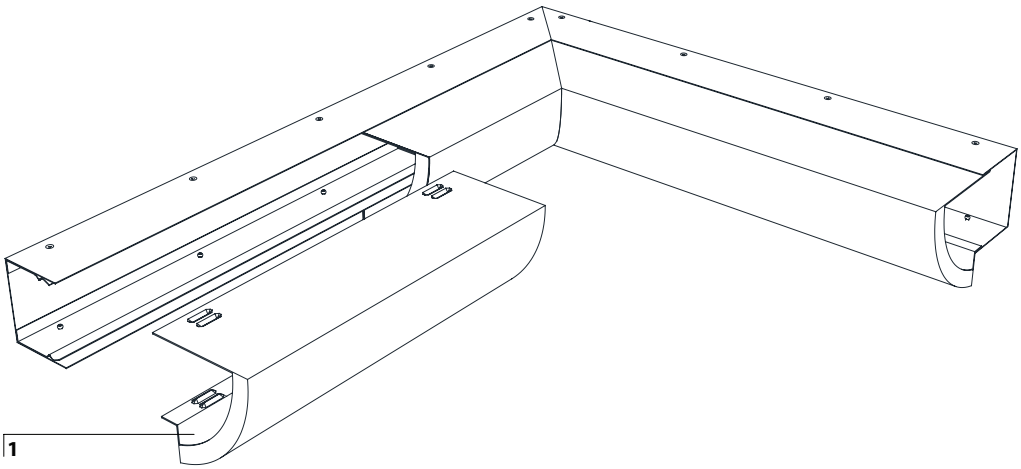

COMPONENTS

1 Panel
2 Carrier Profile
3 Skirting Spring Channel
4 Skirting Bracket
5 Self-Adhesive Seal •
6 Bolts & Nuts

Custom sizes can be offered

SECTION DETAILS

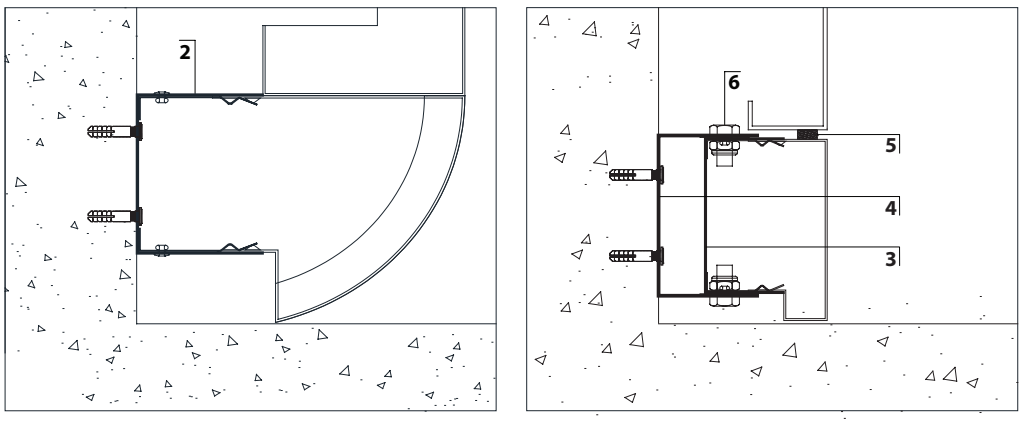

PANEL JOINT DETAILS

Butt Joint

3 & 5mm GAP

Dorso Partitions & False Ceilings L.L.C.
DUBAI INDUSTRIAL PARK
DUBAI, U.A.E.

T: +971 4 451 8884
F: +971 4 454 7073

contactus@dorsoram.com
www.dorsoram.com

©2022 Dorso Partitions & False Ceilings L.L.C.
All Rights Reserved.

DORSO